


REVISIONS

REV	DESCRIPTION	DATE	APPROVED
B1	Redrawn on Acad.	4/12/99	MC

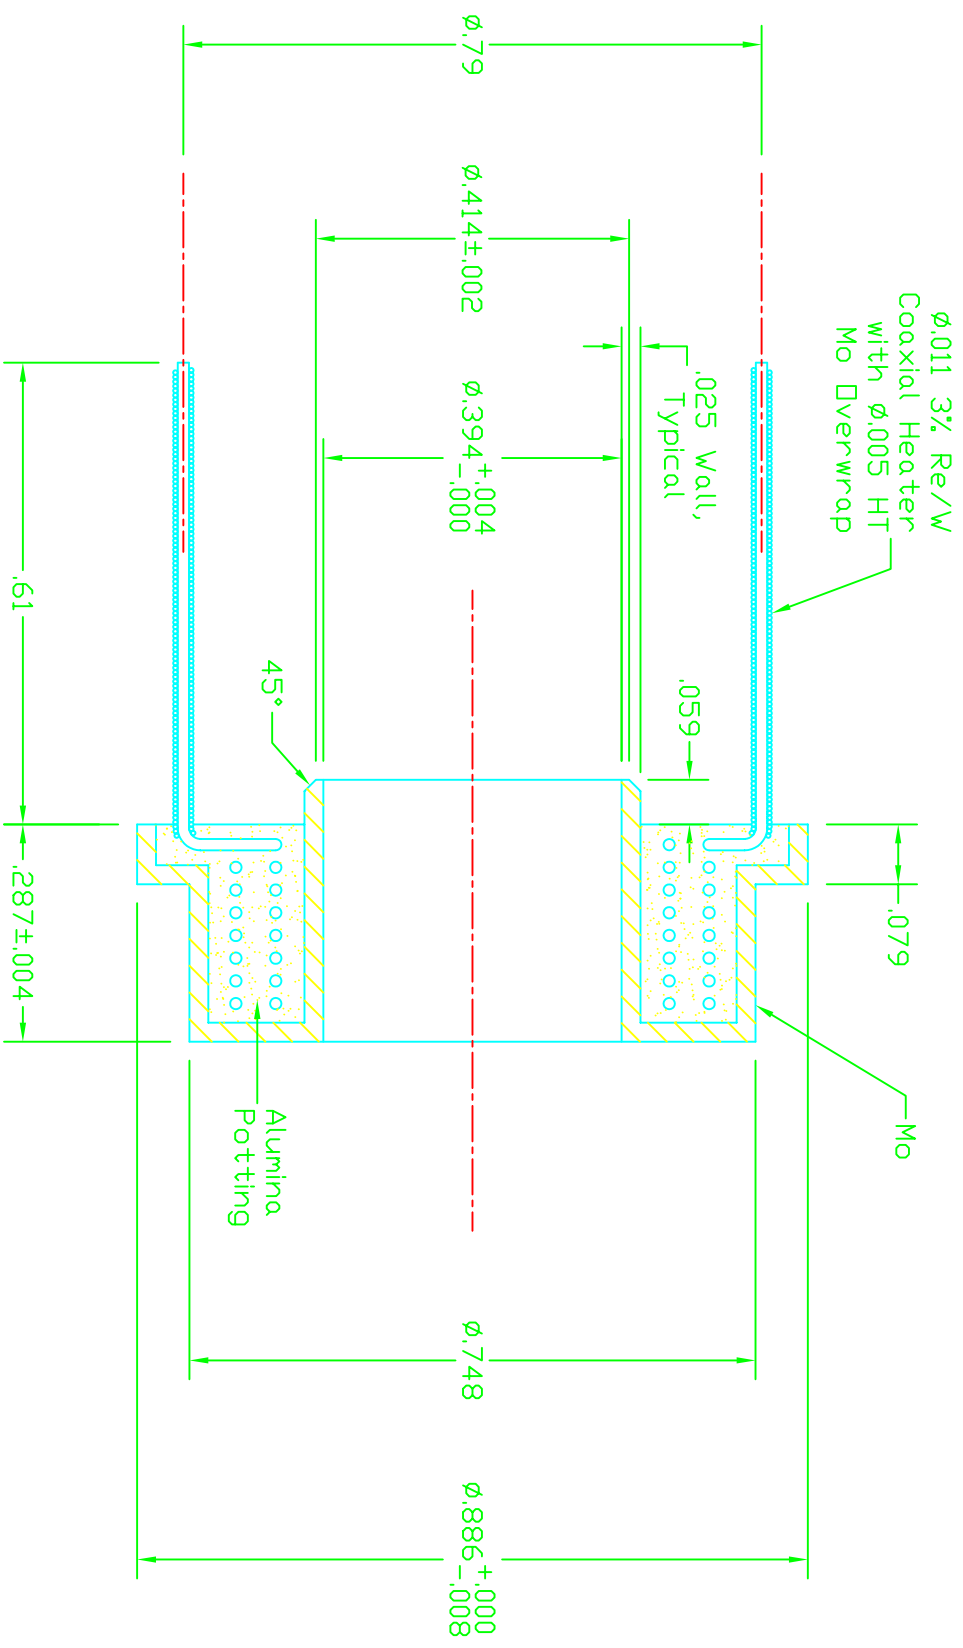

- Notes:
1. Target operation, 7V, 4A @ 600°C and 5A maximum at 1000°C. 1200°C is the maximum operating temperature in UHV.

This document is the property of HeatWave. Its contents may not be reproduced or distributed without express written permission of HeatWave.

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
TOL. XXXX = ±.005 XX = ±.020
FINISH 63 MICROINCHES
ANGLES 0 DEGREE ±30 MINUTES
EDGES AND CORNERS .005 R MAX

MATERIAL
Noted

DD NOT SCALE DRAWING

HeatWave Labs, Inc.
195 Aviation Way, Suite 100
Watsonville, Ca. 95076 Fax: (831) 722-5491

BY DATE
ENGR M. Curtis 10/30/96

UHV Sample Heater

SIZE FSCN NO. DWG. NO. REV
A 101269 B1

THIRD ANGLE PROJECTION SCALE: 4x SHEET: 1/1