

D


C

B

PART NO: 1350

REVISIONS

REV	DESCRIPTION	ECO	DATE	APPROVED

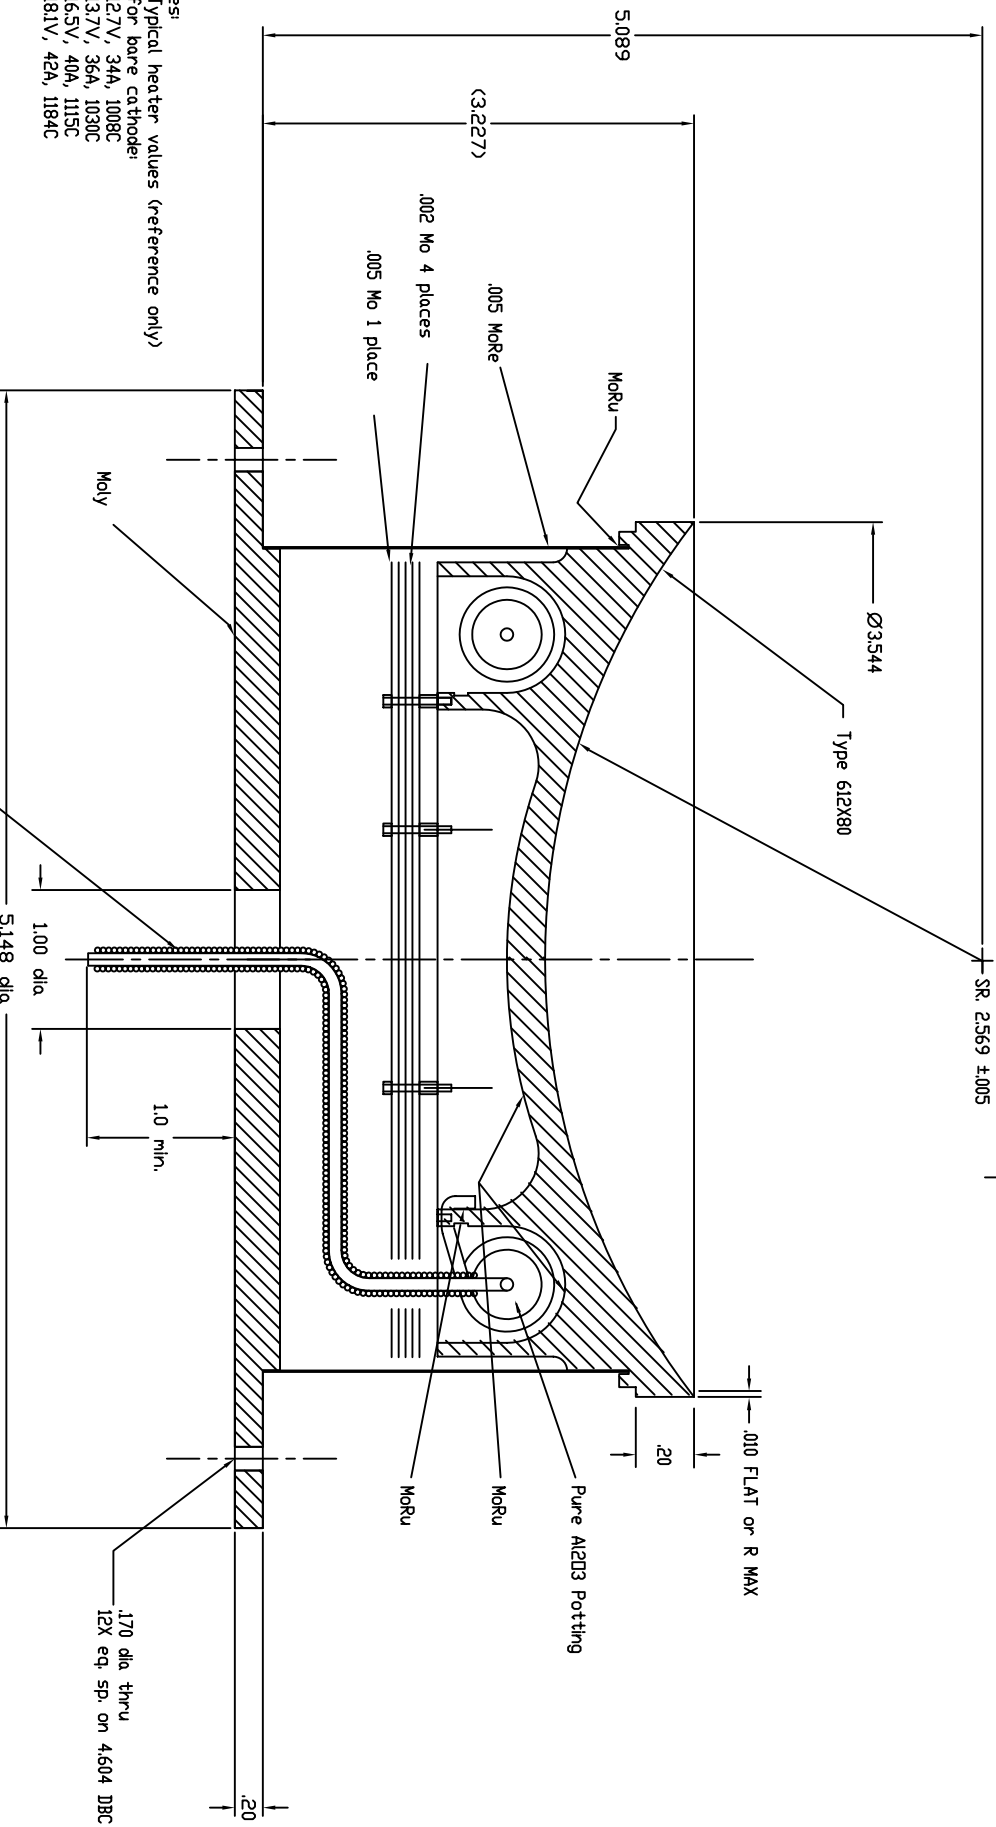

Notes:
 1. Typical heater values (reference only)
 for bare cathode:
 12.7V, 34A, 1008C
 13.7V, 36A, 1030C
 16.5V, 40A, 1115C
 18.1V, 42A, 1184C

This document is the property of HeatWave. Its contents may not be reproduced without written permission of HeatWave.

D

C

B

A

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES

DESIGNED BY	DATE	BY	DATE
DRAWN			
CHK			
ENGRG	7/28/98	Gantner	
APPRD			

MATERIAL: Noted

DO NOT SCALE DRAWING

HeatWave 300 Emerald City Way (831) 722-9081
 Watsonville, CA 95076 (831) 722-5491

CATHODE HEATER ASSEMBLY

SIZE: F/SCN N/A DWG. NO: 1350 REV: 1 OF 1

THIRD ANGLE PROJECTION