


REV	DESCRIPTION	DATE	APPROVED

REVISIONS

NOTES:

1. ALL DIMENSIONS NOT SPECIFIED ARE PER DWG COMPONENT 101-735 (REF SK102390)
2. HEATER SPEC.:  
3A MAX AT 1200°C B  
AS MEASURED SUSPENDED IN VACUUM BELLJAR.
3. USE POTTING JTG 101-738 TO SET POST IN POSITION.
4. FIPT 40 OR 43 - ASSY DECISION.

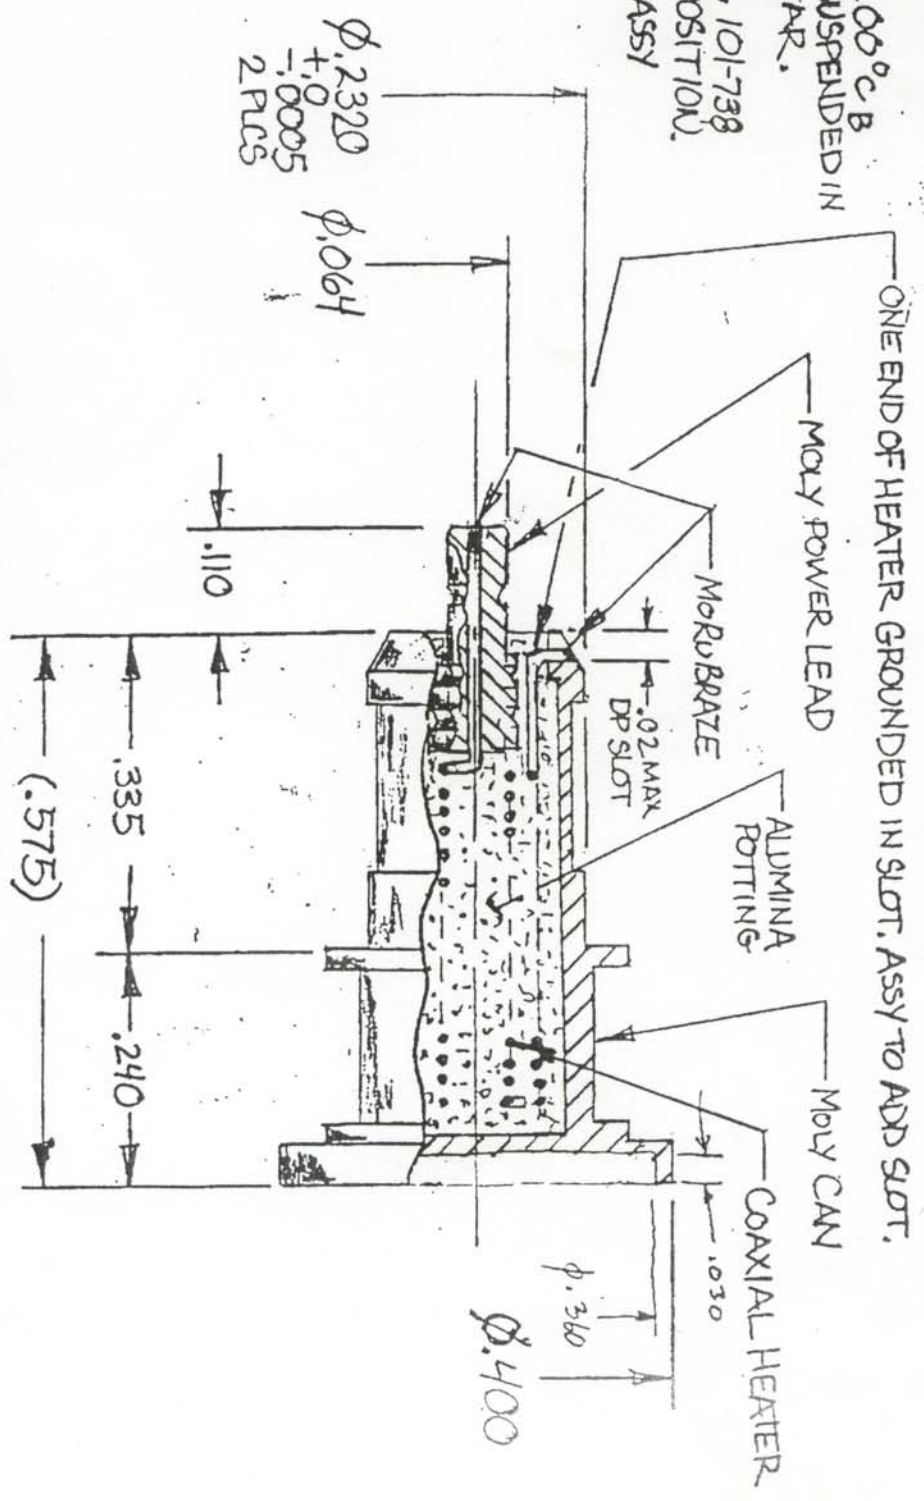

This document is the property of HeatWave. Its contents may not be reproduced or distributed without express written permission of HeatWave.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES.	
TOLERANCES ARE:	
XXX = ±.005	.XX = ±.020
XXXX = ±.0015	
FINISH 63 MICROINCHES	
ANGLES 0 DEGREE ±30 MINUTES	
EDGES AND CORNERS .005 R MAX	
MATERIAL	NOTED
DID NOT SCALE DRAWING	

**HeatWave**  
310 Emerald City Way, Watsonville, CA 95076  
Phone: 831-722-9081 Fax: (831) 722-5491

BY	DATE
ENGR GUNDT/41	
DRAWN	
SIM TO 1483	
SIZE FSCN NO.	DWG. NO.
A	101464
REV	