

#101415 Copper Gaskets

- Standard Conflat sizes
- Gold and Silver plated gaskets available
- For Gold plated order as 1415-XXAU
- For Silver plated order as 1415-XXAG




Part #	Flange Size	SST Screw
101415-01	Reservoir	6-32 x 3/8
101415-02	1 1/3	8-32 x 3/4
101415-03	2 1/8	1/4-28 x 1 1/4
101415-04	2 3/4	1/4-28 x 1 1/4
101415-05	3 3/8	5/16-24 x 1 3/4
101415-06	4 1/2	5/16-24 x 2
101415-07	4 5/8	5/16-24 x 2
101415-08	6	5/16-24 x 2
101415-09	6 3/4	5/16-24 x 2 1/4
101415-10	8	5/16-24 x 2 1/4
101415-11	10	5/16-24 x 2 1/2
101415-12	12	5/16-24 x 2 1/2
101415-13	13 1/4	3/8-24 x 3
101415-14	14	3/8-24 x 3
101415-15	14 1/2	3/8-24 x 3
101415-16	16	3/8-24 x 3
101415-17	16 1/2	3/8-24 x 3
101415-18	18	3/8-24 x 3

#101469 Alumina Spacers


- 95% Alumina
- 450°C temperature rating

Part #	# Pins	"A"	"B"	"C"
101469-01	4 & 10	0.62	0.135	.040 (4) .070 (10)
101469-02	6	0.62	0.135	0.070
101469-03	10	0.62	0.135	0.040
101469-04	11	1.09	0.080	0.090
101469-05	20	1.25	0.125	0.040
101469-06	17	0.60	0.090	0.060
101469-07	20	1.25	0.125	0.070
101469-08	20	1.25	0.090	0.100
101469-09	35	1.69	0.125	0.070
101469-10	35	1.25	0.090	0.090
101469-11	35	1.36	0.125	0.070

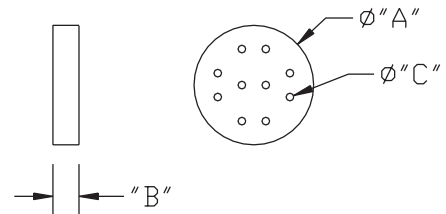

#101383 Ceramic Standoffs

- 400°C bakeable
- UHV compatible glazed ceramics
- Vented screws also available



Part #	DC (kV) In Air	DC (kV) In Vacuum	Thread Size	"A"	"B"	"C"
101383-00	3	7	6-32	3/8	3/8	5/32
101383-01	4	10	6-32	1/2	3/8	3/16
101383-02	5	12	8-32	5/8	1/2	3/16
101383-03	6	15	8-32	3/4	3/8	1/4
101383-04	8	20	6-32	1	3/8	3/8
101383-05	8	20	8-32	1	1/2	3/8
101383-06	8	20	10-32	1	3/4	3/8
101383-07	10	25	1/4-20	1 1/4	1	7/16
101383-08	14	35	8-32	2	1/2	3/8
101383-09	14	35	10-32	2	3/4	3/8
101383-10	16	40	1/4-20	2 1/2	1	5/8